

NOTES:

1. PAVEMENT CUTS SHALL BE STRAIGHT AND VERTICAL.
2. REMOVE TEMPORARY PATCH IF PRESENT. EXCAVATE COMPACTED BACKFILL AS REQUIRED TO INSTALL NEW BITUMINOUS ASPHALT. RE-COMPACT SURFACE OF BACKFILL PRIOR TO INSTALLATION OF PATCH.




CITY OF CHARLOTTESVILLE

REVISION	DATE

CITY STANDARDS  
PERMANENT PAVEMENT  
REPAIR

SCALE: N.T.S.

STANDARD NUMBER: P 1.0

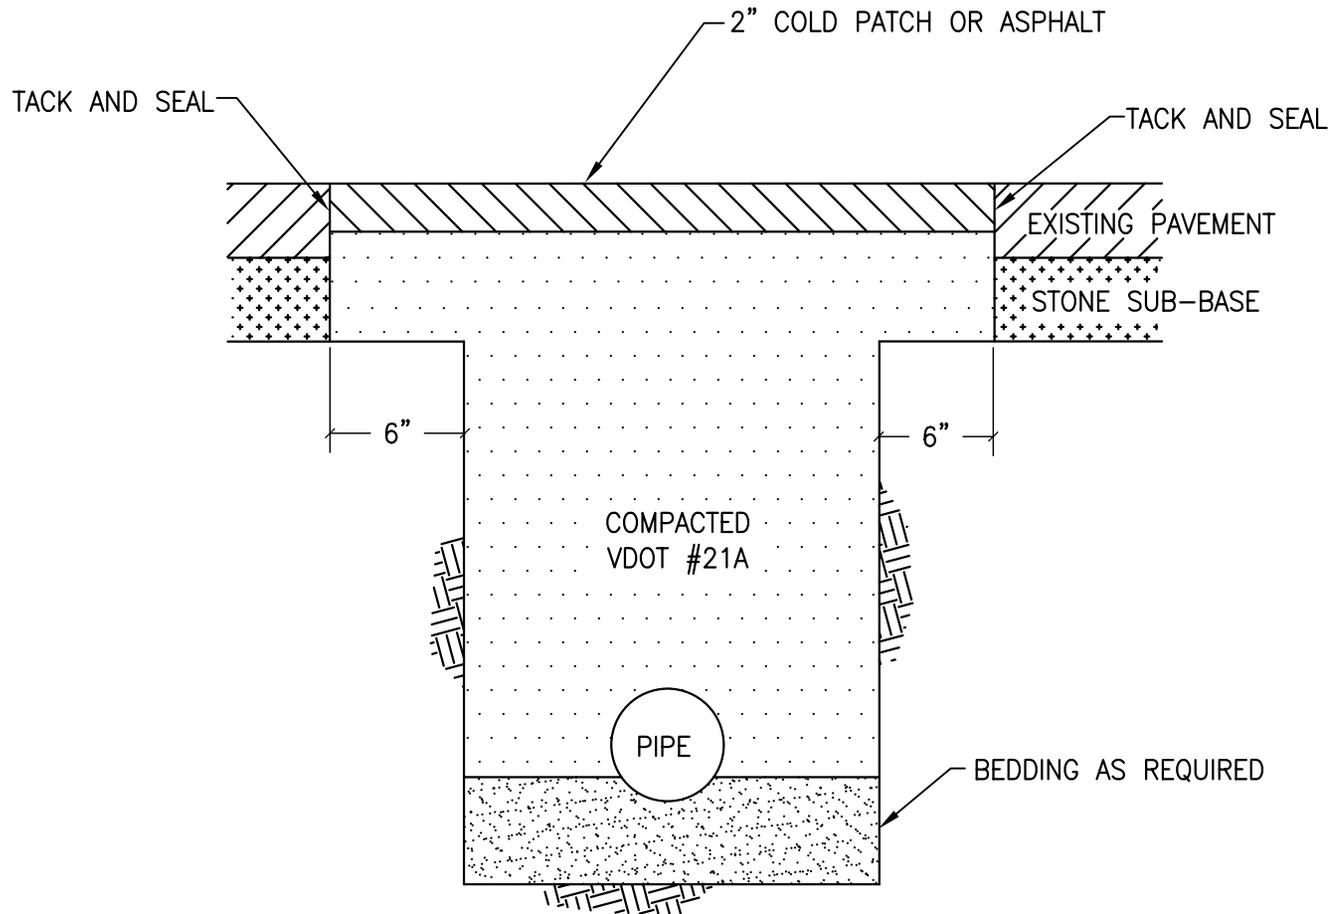

NOTES:

1. TEMPORARY PAVEMENT REPAIR WILL BE REQUIRED IF PERMANENT PAVEMENT REPAIR CAN NOT BE PERFORMED WITHIN 24 HOURS OF TRENCH BACKFILLING.
2. PAVEMENT CUTS SHALL BE STRAIGHT AND VERTICAL.
3. CONTRACTOR SHALL MAINTAIN THE TEMPORARY REPAIR UNTIL PERMANENT PAVEMENT REPAIR IS MADE.



CITY OF CHARLOTTESVILLE

REVISION	DATE

CITY STANDARDS	
TEMPORARY PAVEMENT REPAIR	
SCALE: N.T.S.	STANDARD NUMBER: P 1.1